



Ü-RING

- + Connecting thin walled pipes to clay sockets
- + Socket connection remains
- + Joint system F
- + Resistant to 0.6 bar

Ü-Ring - for the connection of spigots made from plastic, ductile or cast iron to clay sockets

The Ü-Ring DN 200 connects clay thin walled pipes (plastic ductile or cast iron) to clay sockets (joint system F, DIN EN 295).



INSTALLATION



Install Ü-Ring on spigot.




Apply lubricant to socket and Ü-Ring.



Push spigot into socket.

DESCRIPTION

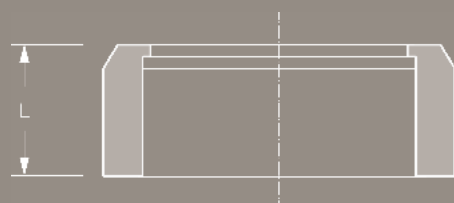

TECHNICAL SPECIFICATION



Ü-Ring for the connection of thin walled pipes (plastic, cast iron, GRP) to clay sockets according to joint system F, DIN EN 295.

Clay Pipe
Connecting Pipe

DN _____
DN/Material _____

Article Number

_____ Qty _____ Price/Unit _____ Total

Manufacturer:
Pressure Tightness:
Jetting Resistance:
Sealing Material:
Temperature Resistance:
Standard/Approval:

MISSION RUBBER (UK) Ltd., Sheffield, S35 9TG, T+44 (0) 114 257 - 0040, F - 1122
0.6 bar water / -0.3 bar vacuum
120 bar
EPDM rubber according to BS EN 681-1
-40°C to +120°C, temporary max. temperature +160°C
BS EN 295-4, CE06



PRODUCT RANGE

Ü-RING						
Article Number	Reference	Outside Ø Spigot (mm)	Clay Pipe Lip-Seal	L Length (mm)	resistant to (bar)	Weight (kg)
20210012	Ü-Ring Clay DN 100 SML/PVC	110	L	60	0,6	0,3
20212511	Ü-Ring Clay DN 125 PVC	125	L	60	0,6	0,3
20212510	Ü-Ring Clay DN 125 SML	135	L	60	0,6	0,4
20215012	Ü-Ring Clay DN 150 SML/PVC	160	L	60	0,6	0,6
20215013	Ü-Ring Clay DN 150 GGG/FC	170	L	60	0,6	0,3
20220020	Ü-Ring Clay DN 200 PVC	200	L	68	0,6	0,9
20220010	Ü-Ring Clay DN 200 SML	210	L	68	0,6	0,9

