



Internal Drain Connector

MRS

- + For different nominal sizes
- + Internal seal
- + Resistant to 0.5 bar
- + Easy & Quick installation




Internal Drain Connector - for the internal connection of pipes with different dimensions.

The internal drain connector is suitable for flush mounting as well as for exposed pipe connections. The **MRS** is made of a high-quality EPDM sealing material, which is characterized by durability and has a noise-reducing effect in downpipes.

INSTALLATION



Position pipe ends.




Fold in or cut off internal drain connector at the desired position, depending on the connection situation.



Insert internal drain connector into larger pipe, apply lubricant and push in smaller pipe.

DESCRIPTION

TECHNICAL SPECIFICATION

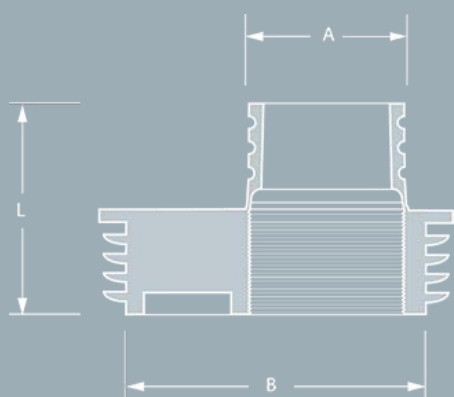

Internal Drain Connector - for the internal connection of pipes with different dimensions.

Pipe 1
Pipe 2

DN/Material _____
DN/Material _____

Article Number

____ Qty ____ Price/Unit ____ Total

Manufacturer: Pressure
Tightness:
Sealing Material:
Temperature Resistance:
UV-/Ozone Resistance:
Standard/Approval:

MISSION RUBBER (UK) Ltd., Sheffield, S35 9TG, T +44 (0) 114 257 - 0040, F - 1122
0.5 bar water / -0.3 bar vacuum
EPDM rubber according to BS EN 681-1
-40°C to +120°C, temporary max. temperature +160°C
Resistant to UV radiation and ozone
BS EN 681-1



PRODUCT RANGE

INTERNAL DRAIN CONNECTOR MRS						
Article Number	Reference	A Size Range (mm)	B Size Range (mm)	L Length (mm)	Resistant to (bar)	Weight (kg)
500130	Internal Drain Connector MRS	40/50	103	67	0,5	0,15
500128	Internal Drain Connector MRS	75/90	103	67	0,5	0,10